FIG. 4

(M_2) ⟋ 402   LARGER DICTIONARY OF COMMON VALUES

| ... | | \$ | | | \$ | | ... |

THIS FIELD VALUE IS USED
AS A POINTER INTO A
DICTIONARY WHEN 0_1 IS NOT
LARGE ENOUGH FOR THAT

401 — | F_1 | F_2 | ... | F_k | 0_1 | 0_2 | ... | 0_l | F_{k+1} | F_{k+2} | ... | F_{k+l} |
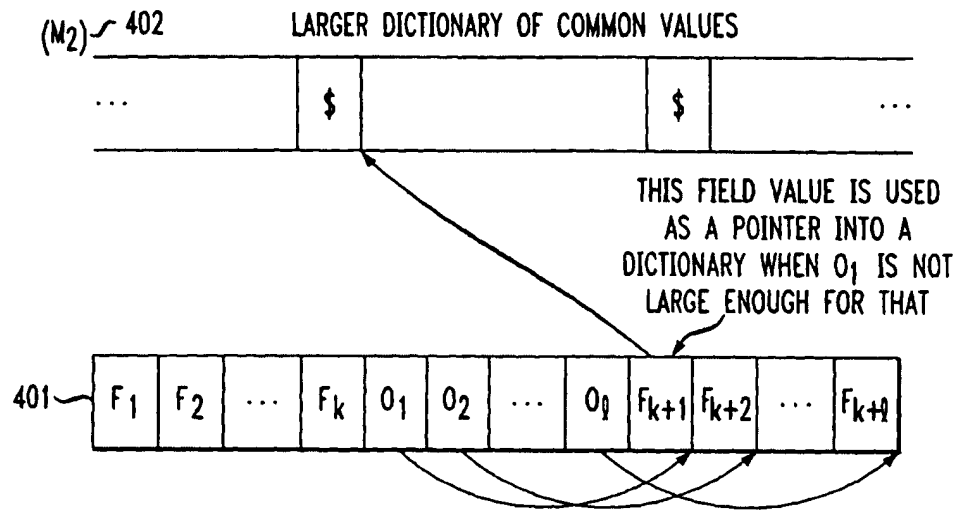
FIG. 5

IN EXCEPTIONALLY LARGE VALUE F_1' FOR F_1 IS STORED AS AN
EXTRA VARIABLE-SIZED FIELD. F_1, THE FIXED SLOT FOR IT, IS
USED TO STORE THE OFFSET POINTER TO TERMINATE F_1'.

501 — | F_1 | F_2 | ... | F_k | 0_1 | 0_2 | ... | 0_l | F_{k+1} | F_{k+2} | ... | | F_1' |